



STUD-LOK SL80 (WHITE) FOR PURLIN & DOUBLE MEMBER CONNECTIONS

- High calibre on-site screw for Purlin and Double Member connections
- Screw conforms to AS3566.1-2002 class 1 with electro galvanising

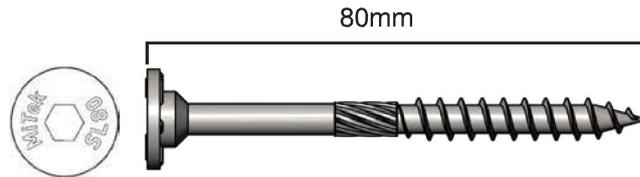


PURLINS

FIXING TYPE D
3.45kN

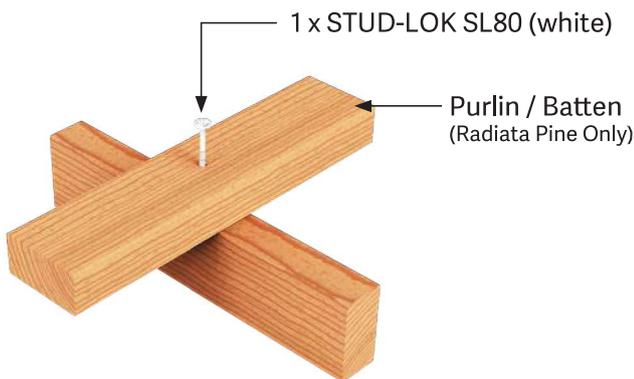

FIXING TYPE E
5.5kN

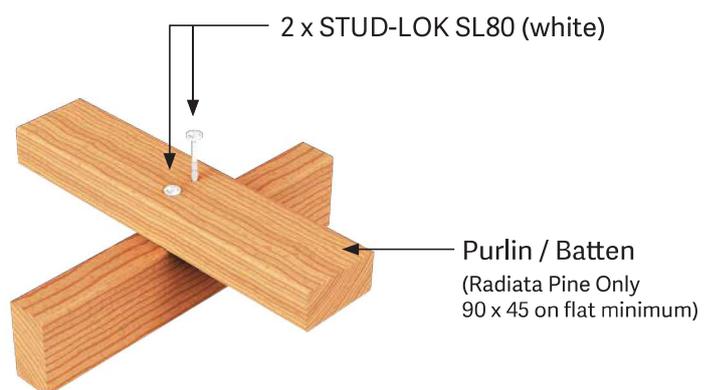

SELECTION CHART FIXING OPTIONS (minimum fixing requirements)

| ROOF WEIGHT | MAX. PURLIN SPAN (mm) | MAX. PURLIN CRS. (mm) | WIND ZONE | | |
|--------------------|-----------------------|-----------------------|-----------|----|----|
| | | | H | VH | EH |
| LIGHT ROOF Purlins | 900 | 900 | D* | D* | D |
| | 1200 | 900 | D* | D | D |
| | 1200 | 1200 | D | E | E |

Wind Zone:
As per NZS
3604:2011


H = High Wind
VH = Very High Wind
EH = Extra High Wind

* Type C LUMBERLOK Blue Screws also work for these options


**Available from leading Builders Supply Merchants
throughout New Zealand**

CONNECTION DOUBLE MEMBERS e.g. Trimmer Studs below Lintels

90mm FRAME

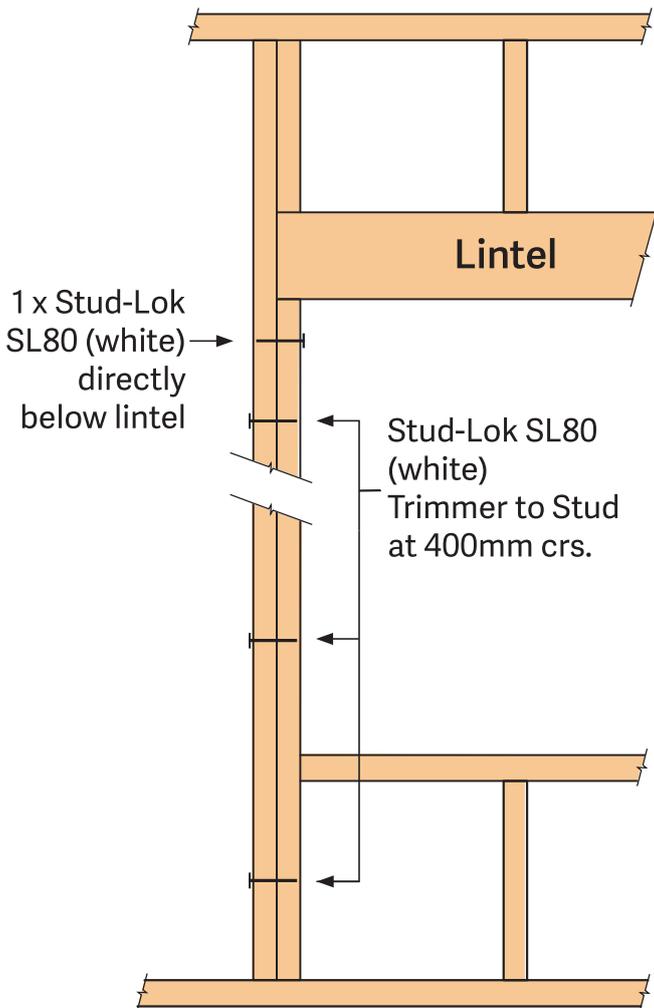

140mm FRAME

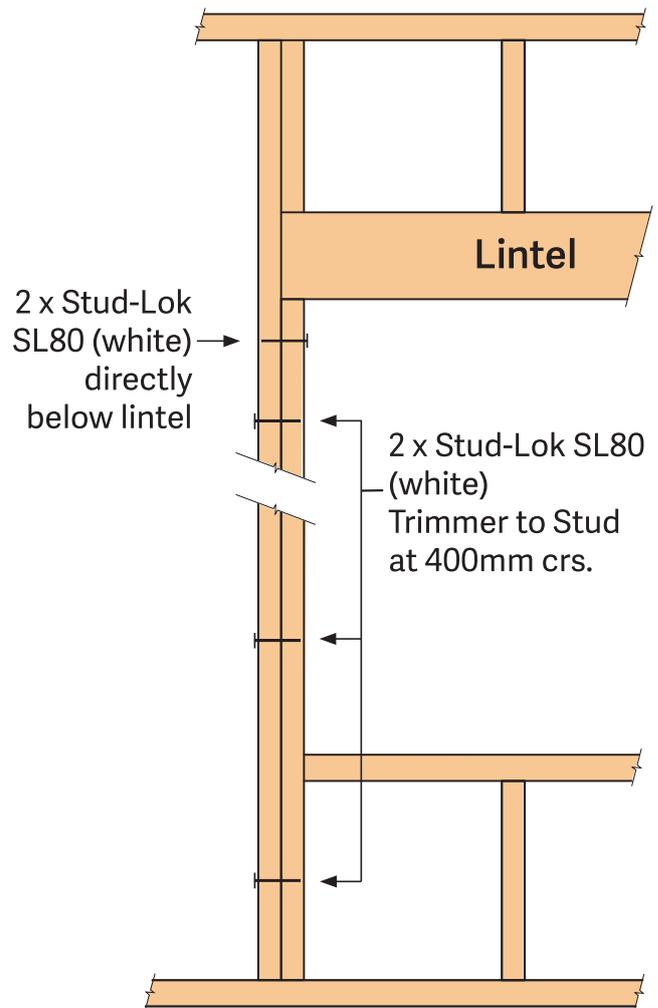

Available from leading Builders Supply Merchants
throughout New Zealand